



MODULE DECOR GL PLANKS TO GLUE

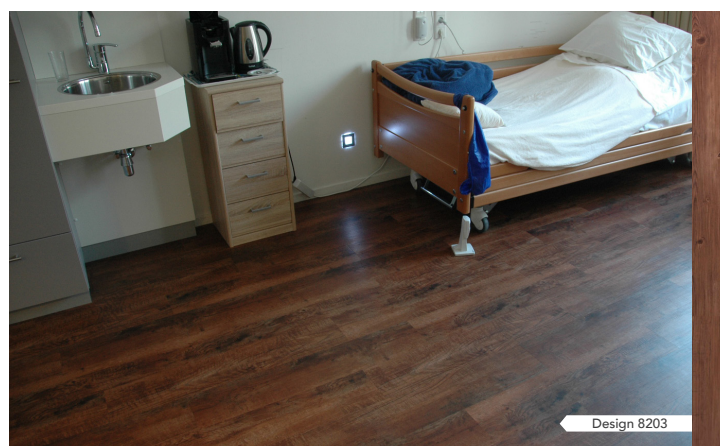


Wide choice of designs: 24 planks of different woods and 11 UNIQ XS / XL designs (chevron parquet, long planks and large tiles) to give a special touch to your room.

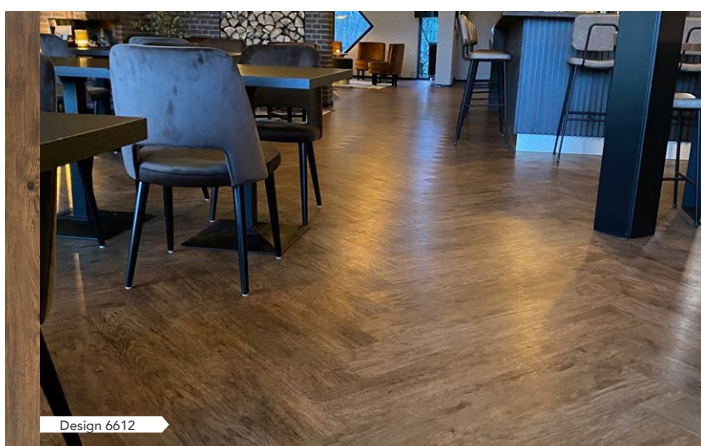

non-contractual pictures

Composition of the **MODULE DECOR GL 3mm** range:
The flooring is to be glued with a one-component glue or double-sided adhesive (available on request)

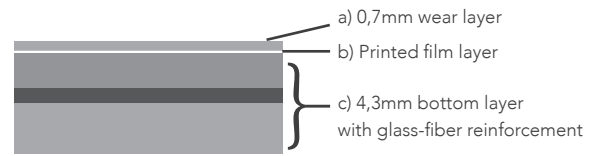

Description	Module Decor GL
Article code	MDEC3GL / MDEC3XL / MDEC3UN
Thickness and hardness	3 mm
Interlocking system	to be glued
Maximum resistance	Very intensive pedestrian traffic
Finish (no waffle back)	PU Matt
Dimensions (mm)	STANDARD : 1.219,2 x 177,8 mm UNIQU XL : Wood : 1.505 x 230 mm Stone : 914,4 x 457,2 mm UNIQU XS : Herringbone parquet : 457,2 x 101,6 mm
Weight / tile	5kg
Pack size / box m ²	15 (standard) planks / box (3,25 m ²) 8 (XL-tiles) / box (3,34 m ²) 10 (XL-plank) / box (3,54 m ²) 72 (XS-plank) / box (3,34 m ²)
Colors available	24 / 11 (UNIQU XL and XS)
Service rules	Delivery within 5 working days, contact us for orders > 300 m ² <small>*Average time noted after confirmation of the order</small>

Technical datasheet	Norms	Module Decor GL
Abrasion	EN 660-2	Group P
Castor wheel	EN 425	No damage
Indentation	EN 433	< 0,10 mm
Fire class	EN 13501-1	Bfl-S1 : very good fire resistance
Electrical resistance	EN 1081	≤10 ¹⁰ Ω
Electrostatic behavior	EN 1815	2kV
Slip Resistance (Europe)	EN13893	Anti slip DS
Slip Resistance (Germany)	DIN 51130	R9
Chemical resistance	EN 423	>6 BWS : Very good
Light Fastness	EN 20105	7BWS / 5GSR : excellent (>100 years)
Subfloor heating	ISO 8302	Compatible
Sound absorption	ISO 140-8	6 Db
European classification	ISO 10582 :2010	



24 designs are available in standard plank format
11 designs are available in XL and XS plank and tile format

MODULE DECOR UNIQU XS Herringbone: