

MODULE *DECOR* LL


LOOSE LAY TILES AND PLANKS



8709



9308

 The product has a patented anti-slip backing for a better fitting and can be installed on an underfloor without the use of glue.



3521



3251

THE PVC TILE IN DENIM JEANS, A UNIQUE PRODUCT: :

Just like its ancestor, the tile, which uses real Denim canvas, fades over time.


Perfectly suited to tertiary environments and homes, it will add a singular touch to your room! And thus allow you to stand out from the competition while offering an original environment for your customers and collaborators.



non-contractual pictures

Composition of the **MODULE DECOR** LL 5mm range :

On uneven support or with high traffic, it is strongly recommended to stabilize the planks or the tiles with a glue or a tackifier.

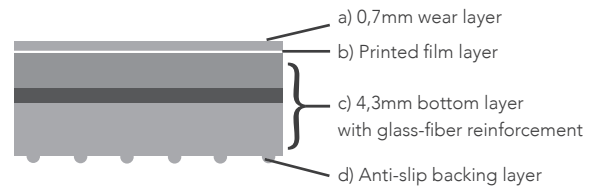

Description	Module Decor LL
Article code	MDEC5LL
Thickness and hardness	5 mm
Interlocking system	Loose lay or glue
Maximum resistance **	Very intensive pedestrian traffic
Finish (no waffle back)	PU Matt
Dimensions (mm)	Tiles : 500 x 500 mm Planks : 1000 x 200 mm
Weight / tile	8kg
Pack size / box m ²	10 tiles / box (2,5 m ²) 10 planks / box (2 m ²)
Colors available	21
Service rules *Average time noted after confirmation of the order	Delivery within 5 working days, contact us for orders > 300 m ²

Technical datasheet	Norms	Module Decor LL
Abrasion	EN 660-2	Group P
Castor wheel	EN 425	No damage
Indentation	EN 433	< 0,10 mm
Fire class	EN 13501-1	Bfl-S1 : very good fire resistance
Electrical resistance	EN 1081	≤10 ¹⁰ Ω
Electrostatic behavior	EN 1815	2kV
Slip Resistance (Europe)	EN13893	Anti slip DS
Slip Resistance (Germany)	DIN 51130	R9
Chemical resistance	EN 423	>6 BWS : Very good
Light Fastness	EN 20105	7BWS / 5GSR : excellent (>100 years)
Subfloor heating	ISO 8302	Compatible
Sound absorption	ISO 140-8	12 Db
European classification	ISO 10582 :2010	

** Indicative and non-contractual maximum resistance. Each environment requires a free diagnosis from Module Floors and gluing tiles might be required. Mandatory gluing in case of contact with the sun or temperatures <0°C et >20°C. 2K PU glue available on request. 2K PU glue available on request.



12 designs are available in PVC planks format (1000 x 200 mm)
10 designs are available in PVC tiles format (500 x 500 mm)

