



MODULE DESIGN

STORES, SUPERMARKETS, OFFICES

The activity can continue during the installation of the tiles. No dust.



Shalestone (R11)

It has excellent anti-slip properties even in wet conditions, and it reduces noise level by 12dB which is substantial in a commercial or retail area.

Excellent anti-slip properties (up to R10) even on wet floors.



ROBUST INTERLOCKING JOINTS THAT CAN WITHSTAND A PALLET TRUCK UP TO 1 TON.

Grey Terrazzo




Granite



Vintage maple

Hidden joint : prevent from water leakage

Can cover uneven, damp and dusty sub floors.

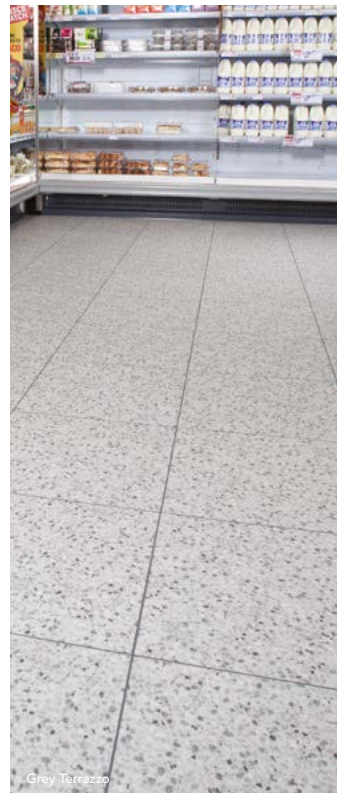

Grey Terrazzo

MODULE DESIGN WOOD



Vintage sand




Vintage ash



Vintage maple

PROVIDE A
UNIQUE SALES EXPERIENCE
TO YOUR CUSTOMERS !

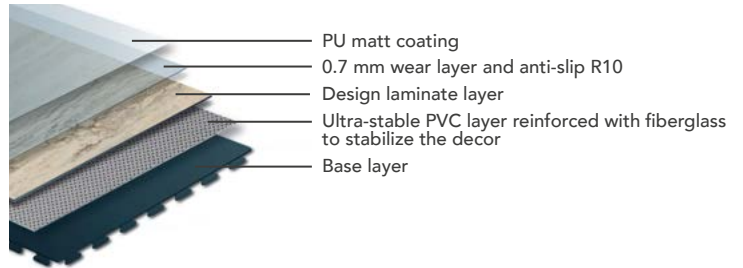

High stability, heterogeneous flooring
reinforced with glass fiber.

MODULE DESIGN STONE



Limestone



Cream terrazzo



Grey terrazzo



Granite



Polished concrete



Sandstone



Volcano



Shalestone



Clay

Description	Module Design
Article code	MDES8
Thickness and hardness	7.8 mm Shore A 92
Interlocking system	Hidden joint
Maximum resistance **	Pallet truck up to 1 ton (electric or manual)
Finish (waffle back)	PU Matt (waffle back)
Dimensions (mm)	457 x 457
Tiles and Weight per m ²	457 x 457mm : 5 tiles / 9.6 kgs
Weight / Tile	1.92 kgs
Pack size / box m ²	457 x 457mm : 5 tiles / box (1,04 m ²)
Delivery within 10 working days, contact us for orders > 300 m ²	

Technical datasheet	Standards	Module Design
Abrasion	EN 660-2	Group P
Castor wheel	EN 425	No damage
Indentation	EN 433	0.06 mm
Fire class	EN 13501-1	Bfl-S1 : very good fire resistance
Electrical resistance	EN 1081	≤10 ¹² Ω
Slip Resistance (Europe)	EN13893	Anti Slip DS
Slip Resistance (Germany)	DIN 51130	R10
Light Fastness	EN 20105	6-8 BWS : excellent
Thermal conductivity	ISO 8302	0.052 m ² K/W
Resistance to compression	EN 15451	N/A
Sound absorption	ISO 140-8	12 Db



** Indicative and non-contractual maximum resistance. Each environment requires a free diagnosis from Module Floors and gluing tiles might be required. Mandatory gluing in case of contact with the sun or temperatures <0°C et >20°C. 2K PU glue available on request.



5 YEARS WARRANTY

