

# MODULE KIDZ X30mm and X40mm



## FIELDS, OUTDOOR PLAYGROUNDS

### Comfort and safety for children

- Impact absorption
- Water permeable (dries quickly without puddling)
- Anti-slip and noise reduction properties



BEFORE




YOUR OLD TYRES CAN BE TRANSFORMED INTO FLOORING!

AFTER

### fall height [m] / thickness [mm].

Complies with standard EN 1177, impact absorption playground floors.

All thicknesses are available upon request to meet all needs, environments and applications.

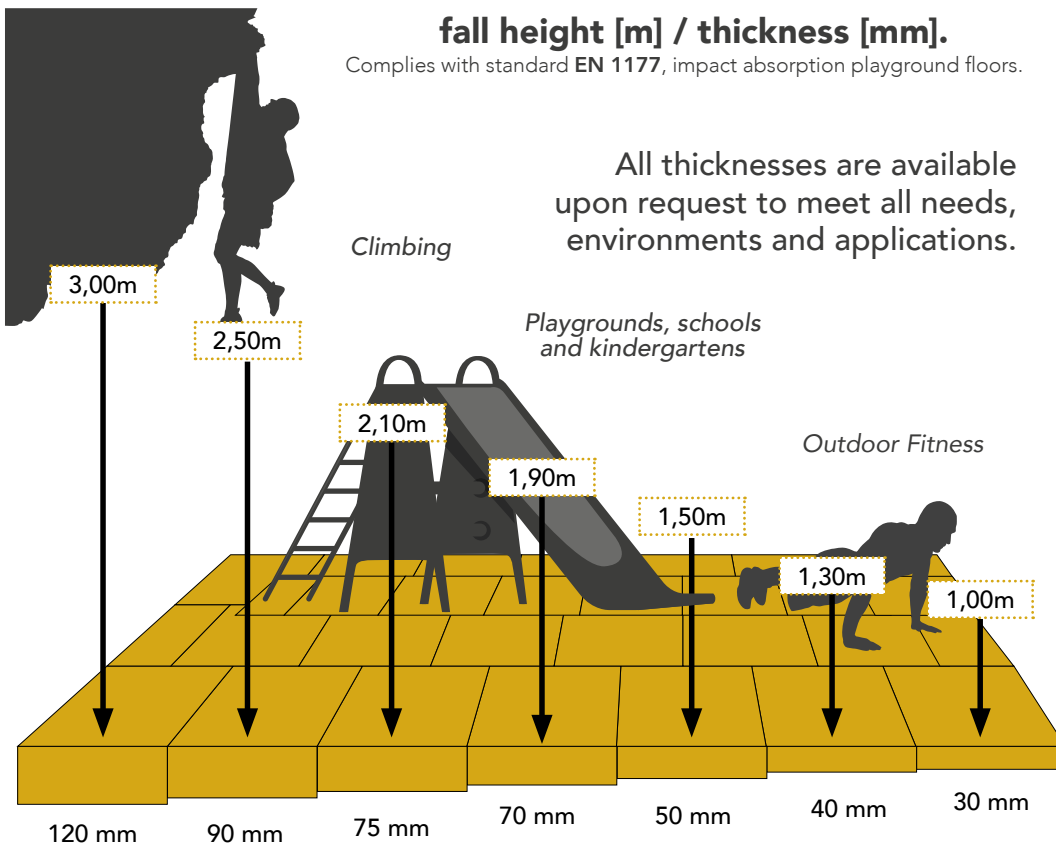

THERMAL INSULATION



ANTI-SLIP PROPERTIES



QUICK AND EASY TO INSTALL



UV-RESISTANT



ACOUSTIC INSULATION







Red and green



Red and green

Description	Norms	Module Kidz X30	Module Kidz X40
Thickness	EN 4282	30mm	40mm
Thickness tolerance		+/- 2mm	
Dimensions (mm)	EN 426	500 x 500 (also available in 503x1006mm)	
Article code		MKID30	MKID40
Fall height	EN 1177	100 cm	120 cm
Weight / tile	EN 430	21kg /m <sup>2</sup>	26kg /m <sup>2</sup>
Composition		SBR Rubber	
Slip Resistance	DIN 51097	Group C (24o): High slip resistance in wet conditions	
Fire class	EN 13501-1	E <sub>fl</sub> (C <sub>fl</sub> and B <sub>fl</sub> on request)	
Packaging		packaging per tile (16 connectors per m <sup>2</sup> are provided free of charge)	

SBR rubber colors

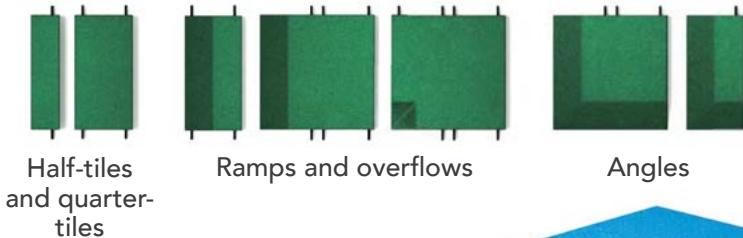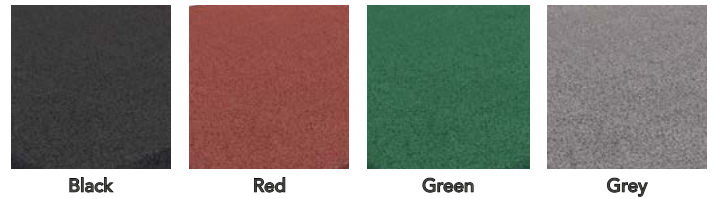

**ALSO AVAILABLE IN AQUA**  
 Perforated safety tile  
 Highly resistant to abrasion, UV,  
 chlorine and salt water. Quick-drying.



Green