




MODULE SOLID

Paving or Honeycomb



HEAVY DUTY AND MOBILITY FLOORING

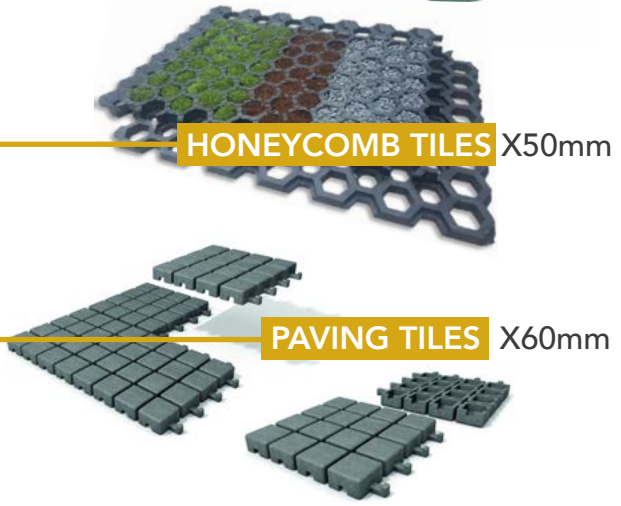

Can withstand very heavy loads, trucks, machines and cars.
Easy to install, remove and transfer.



Technical datasheet	Norms	Paving tiles X60 Recycled	Honeycomb tiles X50 Recycled
Thickness	EN 4282	60mm	50mm
Dimensions (mm)	EN 426	500 x 500mm	500 x 400mm
Article code		MSOL60	MSOL40NA
Weight / m ²	EN 430	8.35 kg/tile	10.5kg/m ² (2.1 kg/tile)
Maximum resistance *		Load class : SLW 60	up to 26t/m ² on stabilised ground up to 22t/m ² on smooth ground
Thermal resistance		-30°C / +60°C	-30°C / +60°C
Fire class	EN 13501-1	E _{fl} -S1	E _{fl} -S1
Colours available		Grey	Black
Packaging		60 tiles (15 m ²) per pallet	100 tiles (20 m ²) per pallet

* Maximum resistance is indicative and not contractual.
Due to the recycling process, differences in color and texture are to be expected and small white spots may appear. Colors may vary from one production run to another and may show imperfections due to the recycling process. Recycled tiles have an odor that is not harmful to health. Dimensional variations (+/-3%) are also possible.

